
## Patterns for Hotoke dô.

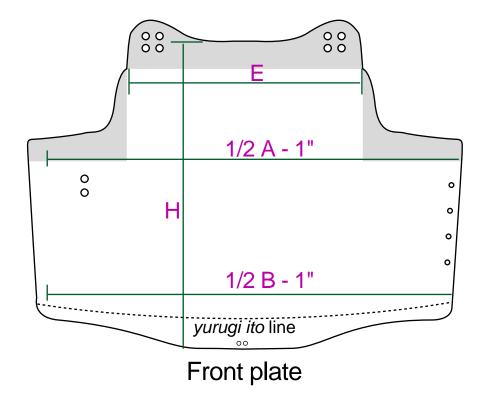

These circles mark placement of the side hinge.

Remember that there is a c. 1" overlap both front and back on the right side, with the back plate being the overlapping plate.

If you are making a ryô awase dô version, cut both sides of the back plate with the curve, omitting the hinge placement.

For a more "fancy" hotoke dô, remove the gray areas and replace with normal kanagu mawari, which you must make separately.

